



Packing Guide for Asbestos Containing Materials (ACM's) for Export



PACKING AND LABELLING OF ASBESTOS CONTAINING MATERIAL

— GENERAL REQUIREMENTS

Small sized sections of asbestos must first be placed into UN-approved red bags which display the appropriate asbestos warning label and then goose necked sealed with tape. DO NOT break sections of ACM to make them fit the bag.

- The red bag should then be wiped clean before being carefully placed into a suitable approved clear asbestos bag which should then also be goose necked sealed with tape.
- The waste bags must be appropriately labelled to identify that they contain asbestos waste.

Bulky, large or sharp edged sections of asbestos (including pipes) must be double wrapped in two layers of 1,000 gauge polythene and securely sealed with good quality tape (preferably 75mm duct tape).

- A printed label (with the same information as the bag) must be securely attached to the packaging to indicate that it contains asbestos waste.



Failure to comply with these guidelines may result in the shipment being rejected or quarantined

2 of 8



PACKING AND LABELLING OF ASBESTOS CONTAINING MATERIAL

-Asbestos Pipes Guidelines

Asbestos pipes must be packed in such a way that ensures safe transport to Greenogue facility and safe transport to Disposal facility. To ensure the above the following packaging guidelines must be adhered:

- Asbestos Pipes must be individually wrapped in 1,000-gauge polythene and sealed by 75mm Duct Tape
- Pipes must be placed on two 1200mm x 1000mm four-way heavy duty euro pallets (Please see attached photographs)
- Pipes must be banded securely to pallets (Approximately 4 straps per bale of pipes)
- Pipes must be stacked flat to ensure double stacking. Where possible pipes can be double stacked with assistance of timbers for stability. They must then be banded together and wrapped to ensure stability whilst in transport.



Failure to comply with these guidelines may result in the shipment being rejected or quarantined

3 of 8



PACKING AND LABELLING OF ASBESTOS CONTAINING MATERIAL

— TRANSPORT TO THE ENVA GREENOGUE ENVIRONMENTAL SITE

Conditions of Acceptance

- All ACM's must be packed according to the standards outlined in this document. These standards are in line with the requirements of the Health and Safety Authority.
- CLEARLY MARK each package with '01' or '05' to indicate the corresponding LoW code.
- Once the material has been double bagged (i.e. red and white UN-approved packaging), it must then be placed in UN-approved FIBC bags. This is to enable safe transport.
- These UN-approved FIBC bags must then be goose necked sealed with tape.
- FIBC bags must not be overfilled and weight restrictions of the packaging will apply.
- FIBC bags must be placed on Pallets (dimensions 1200mm x 1000mm) to ensure safe loading and unloading at collection site and Greenogue facility.
- There must be no debris on the outer packaging.



Failure to comply with these guidelines may result in the shipment being rejected or quarantined

4 of 8



PACKING AND LABELLING OF ASBESTOS CONTAINING MATERIAL

Packaging in 1,000 Gauge Polythene

Bulky, large or sharp edged sections of asbestos must be double wrapped in two layers of 1,000 gauge polythene and securely sealed with good quality tape (preferably 75mm duct tape).

Conditions of Acceptance

- All packaged sheets longer than 2m must be supported by two pallets underneath (euro pallet 1200mm x800mm).
- Similar shaped ACM's must be packed together. It is not acceptable to pack flat and corrugated sheeting in the same packaged bale.
- Weight restriction of 1tonne applies per bale (25 sheets).
- Downpipes, gutters etc. must be placed in FIBCs or baled separately (if oversized) and not mixed with sheeting.
- All pipes must be individually wrapped and banded in a single layer and not pyramid stacked.
- All pallets of sheeting must be level on top for stacking purposes.
- There must be no debris on the outer packaging.




Failure to comply with these guidelines may result in the shipment being rejected or quarantined


5 of 8



PACKING AND LABELLING OF ASBESTOS CONTAINING MATERIAL

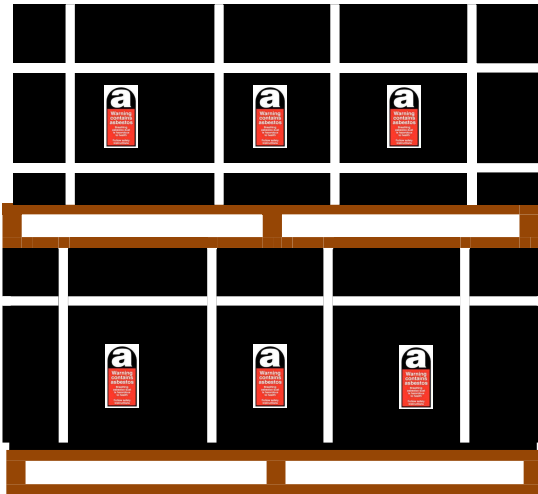

When stacking pallets, ensure that the packaged material on the pallet does not overhang any part of the pallet.

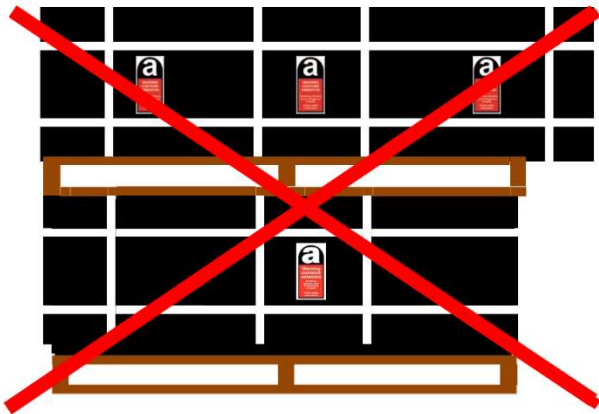

Overhanging packaged material creates an unstable load and could lead to damaged packaging (resulting in possible fibre release).

Failure to comply with these guidelines may result in the shipment being rejected or quarantined

PACKING AND LABELLING OF ASBESTOS CONTAINING MATERIAL

Conditions of Acceptance

- All soil containing ACMs must be placed in FIBC bags. The bags must be sift proof and water resistant or have a sift proof and a water resistant liner.
- The FIBCs must be goose necked (liner also), tied and taped.
- FIBCs must conform to UN standard 13H3/Z
- All packages shall be labelled with the 'asbestos A' warning labels.
- All bags must be weighed to ensure that the contents do not exceed the permissible weight.
- FIBCs shall be kept clean and free from any debris.



Failure to comply with these guidelines may result in the shipment being rejected or quarantined

7 of 8



Liability

- ❑ The Waste delivered to Enva shall meet the quality requirements specified in these Packaging Guidelines. Enva may reject any part of the Waste not conforming to such quality requirements. Enva shall notify customer of any such non-conformity and, unless the Parties agree on any alternative way of disposal, customer shall, at its own cost, take back such non-conforming Waste without any delay or accept additional costs for repacking of Asbestos materials.
- ❑ The Customer shall compensate Enva for any costs or loss sustained by Enva as a result of the delivered Waste not conforming with the quality requirements set out in this Agreement or Enva otherwise not complying with its obligations as set out herein.
- ❑ Liability as set out above shall apply irrespective of the Waste having been inspected by Enva and irrespective of such inspection (if performed) not showing non-conformity

Bookings

Before any waste is accepted into Enva's facility the below must be provided:

- ❑ Asbestos Survey
 - Picture Profile of the ACM's especially on pallets or baled ACM's all angles (side & front);
- ❑ Duly Filled Asbestos Booking Form

All Deliveries must be accepted between 07:00 – 15:00.

Failure to comply with the above guidelines may result in shipment being rejected or quarantined.

Failure to comply with these guidelines may result in the shipment being rejected or quarantined

8 of 8





ASBESTOS BOOKING FORM

Contact Details

Karl Sharkey

089 7012184

karl.sharkey@enva.com

Greenogue.Asbestosdisposal@enva.com

Job Details

Job Title / Address	
Booking Company	
Contact Details for Site Collection	
Description	
LoW	
Purchase Order No.	
Approx. Tonnage	
No. of Pallets/FIBC	
Date for Disposal/Collection	
Approx. Arrival Time	
Waste Transfer Form No. (WTF)	
RILTA Job Ticket No.	
Notes: Moffat / Mounted Forklift Require Yes/No?	

Enva, Block 402, Grants Drive,
Greenogue Business Park,
Rathcoole, Dublin
01 4018000 |
info@enva.com